

VRLA/SLA Battery series is designed with AGM Long Life / Duration In High Performance Plate with Gain Extra Powder in Purify Electrolyte. Innovation Design of Fully Maintenance Free in Float Life 12 years. This is Highly Suited to Backup Applications in UPS/ EPS, Security Alarm System, Emergency Light, Telecommunication System and other

Feature

- Smart UPS Battery Design up to 10%
- Battery Capacity 90Ah / 1500W-15min
- AGM/SLA -Seal Lead Acid Battery
- Maintenance Free Battery Operation
- Non-Spillable Construction Design
- ABS Container & Cover UL94HB-0
- Safety Valve in explosion proof
- CE & UL Product Certificate
- ISO9001 & ISO14001 Certified Factory

Application

- UPS & EPS
- Emergency System
- Communication Eq.
- Security System
- Control Equipment
- Alarm System
- Medical Equipment
- Cable TV & CCTV


Specifications

Voltage Normal : 12 VDC in 6 Cell
Capacity @20Hr : 95Ah @4.77A/54W
 @ 5Hr : 84Ah @16.8A/192W
 @ 1Hr : 55Ah @55.3A/636W
 @15min : 35Ah @140A/1536W (*UPS)
 @ 5min : 20Ah @239A/2568W (*UPS)
Max. Discharge : 1200A @14C
Max. Charge Current : 27A @0.3C
Internal Resistance : Apporx. 6 mΩ Full Charge at 25°C
Design Float Life : 12 years at 25 °C
Cycle Lift Service : 1500 cycles at DOD 25%
Float Charge Voltage : 14.4-15.0V (-30mV/°C) at 25°C
Cycle Charge Voltage : 13.5-13.8V (-20mV/°C) at 25°C
Operation Temp. : Normal 25+/-3 °C
 : Discharge -15 - 50 °C
 : Charge -15 - 50 °C
 : Storage -15 - 50 °C
Self Discharge : more than 6 Month at 25°C
Terminal : M6
Container Material : ABS UL94 HB-0 (Option :UL94V-0)
Physical : 300x169x214mm – 25.5 Kgs


EX1290-1500W : 12V-90Ah /1500W-15min




Dimension 300x169x214mm Weight = 25.5kgs @M6

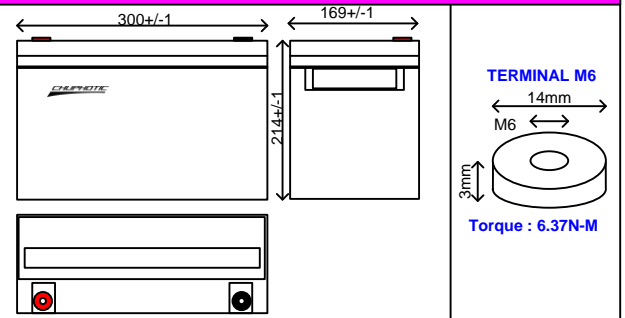


Terminal Voltage (V) and Discharge Time

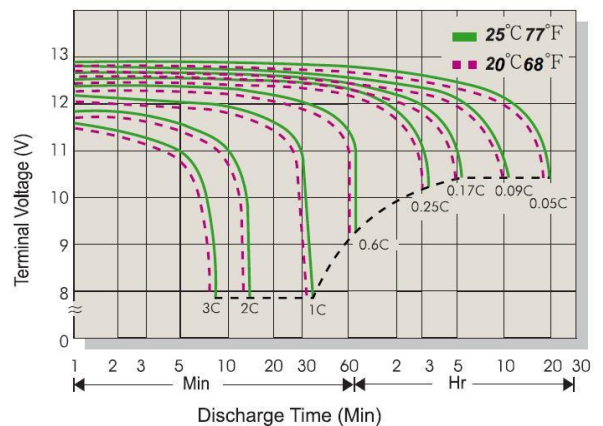


Battery Voltage and Charge Time for Standby Use

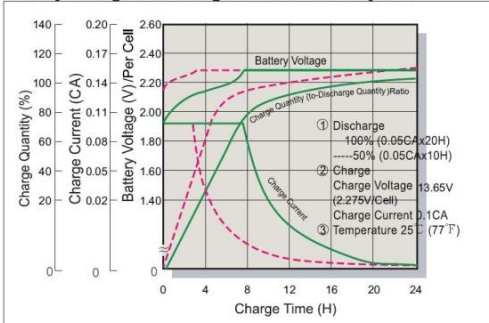

Battery Voltage and Charge Time for Cycle Use

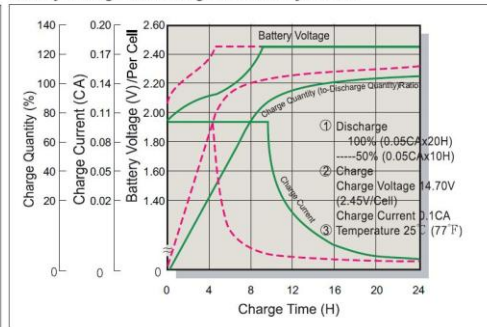

Cycle Service Life

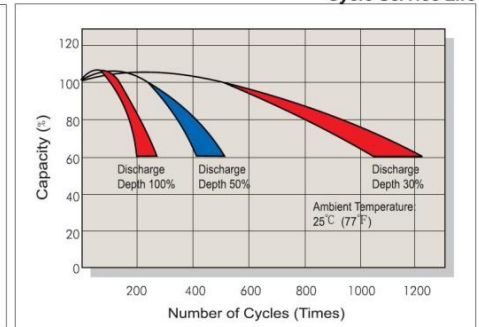

Constant Current (Amp) and Power (Watt/Box) Discharge Table

VRLA-Battery Performance : %DOD , Constant Current , Constant Power (25°C/ 10.5 F.V.)

	5 Min	10 Min	15 Min	20 Min	30 Min	60 Min	2 Hr	3 Hr	5 Hr	10 Hr	20 Hr
Capacity Batt.	19.9Ah	29.3Ah	35Ah	37.7Ah	44.1Ah	55.3Ah	63Ah	72.9Ah	84Ah	90Ah	95.4Ah
% DOD	22%	32%	39%	42%	49%	61%	70%	81%	93%	100%	106%
Cons.Current	239A	176A	140A	113A	88.2A	55.3A	31.5A	24.3A	16.8A	9.0A	4.77A
Cons. Power	2568W	1932W	1536W	1243W	996W	636W	362W	278W	192W	108W	54W

Chuphotic EX1290-1500W Rev.1.00